



APPROVALS



 **ENGINEERING CODE**
269NA51

 **APPROVED REFRIGERANT**
R-134a

 **POWER SUPPLY**
220-240 V 50 Hz

 **STANDARD CONDITIONS**
EN12900

 **APPLICATION**
HBP

 **COOLING CAPACITY**
1431 W (HBP)

 **EFFICIENCY**
2.08 W/W (HBP)

 **MOTOR TYPE**
CSIR

 **STARTING TORQUE**
HST

DATA

General Data

Type	Hermetic reciprocating
Technology Type	On-Off
Displacement	16.8 cm ³
Compressor Cooling	Fan/NotControlled/220
Fan Air Flow	520 m ³ /h
Expansion Device	Capillary Tube or Expansion Valve
Horse Power	1/2 hp
Max Condensing Pressure Operating	13.92 bar
Max Condensing Pressure Peak	15.62 bar
Power Supply	220-240 V 50 Hz
Evaporating Temperature Range	-15 °C to 10 °C

Electrical Data

Motor type	CSIR
Starting Torque	HST
Start Winding Resistance	14.26 Ω at 25° C
Run Winding Resistance	4.25 Ω at 25° C

Mechanical Data

Maximum Recommended Refrigerant Charge	350 g
Oil Charge	350 ml
Oil Type Configuration	ESTER
Oil Type Viscosity	ISO22
Pressurization	Dry air charge
Weight	11.6 Kg
Free Internal Volume	2.1 L

Electrical Components

	Description
Start Capacitor	108-130 Uf / 330 V
Starting Device	Relay MTRPH-0048-65*
Motor Protection	MST20APK-3259

External Characteristics

Base Plate		European	
Tray Holder		No	
Height		206 mm	
Connector	Internal Diameter		Shape
Suction	8.1 mm	Slanted 42°/Copper	
Discharge	6.1 mm	Straight/Copper	
Process	6.1 mm	Slanted 42°/Copper	

PERFORMANCE

Rated Points

Condensing Temperature	Evaporating Temperature	Cooling Capacity	Power Consumption	Gas Flow Rate	Efficiency
50.00°C	5.00°C	1431 W	689 W	35.99 kg/h	2.08 W/W

Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Evaporation 5.00°C, Condensing 50.00°C, Ambient 35°C , Liquid 50°C, Subcooling 0K. Data are an indication of performance based simulation.

Performance Curve Data

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-15	739	387	15.63	1.91
-10	934	432	19.87	2.16
-5	1166	482	24.92	2.42
0	1433	537	30.83	2.67
5	1739	596	37.67	2.91
10	2082	662	45.53	3.15

Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data are an indication of performance based simulation.

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-15	647	411	15.01	1.57
-10	822	465	19.18	1.77
-5	1029	523	24.13	1.97
0	1268	587	29.94	2.16
5	1540	656	36.68	2.35
10	1847	732	44.41	2.52


Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data are an indication of performance based simulation.

Condensing Temperature 55°C


Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-10	705	500	18.29	1.41
-5	887	567	23.14	1.56
0	1097	640	28.83	1.71
5	1336	719	35.44	1.86
10	1605	804	43.04	2

Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data are an indication of performance based simulation.


Operating Envelope

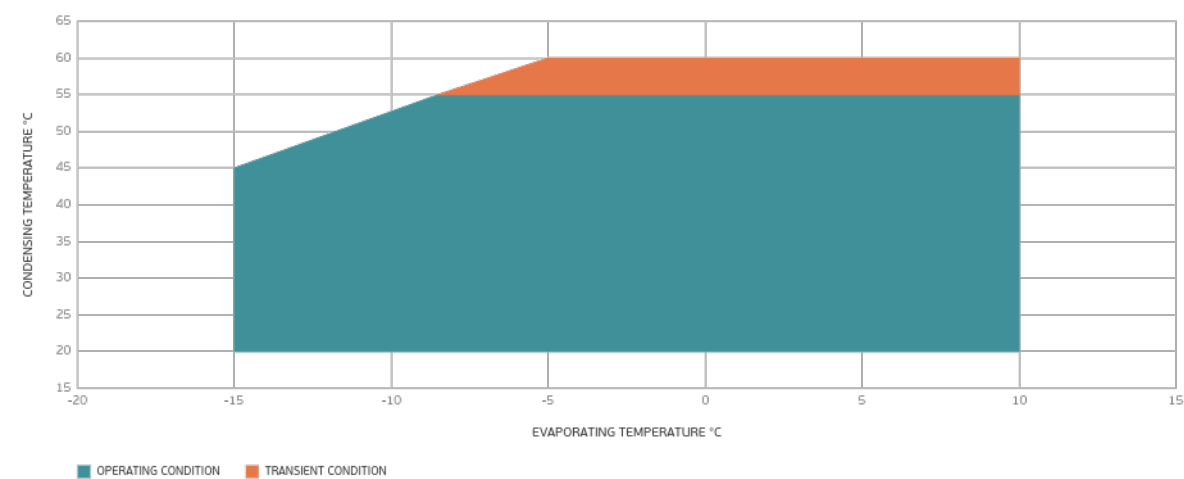

External Dimensions

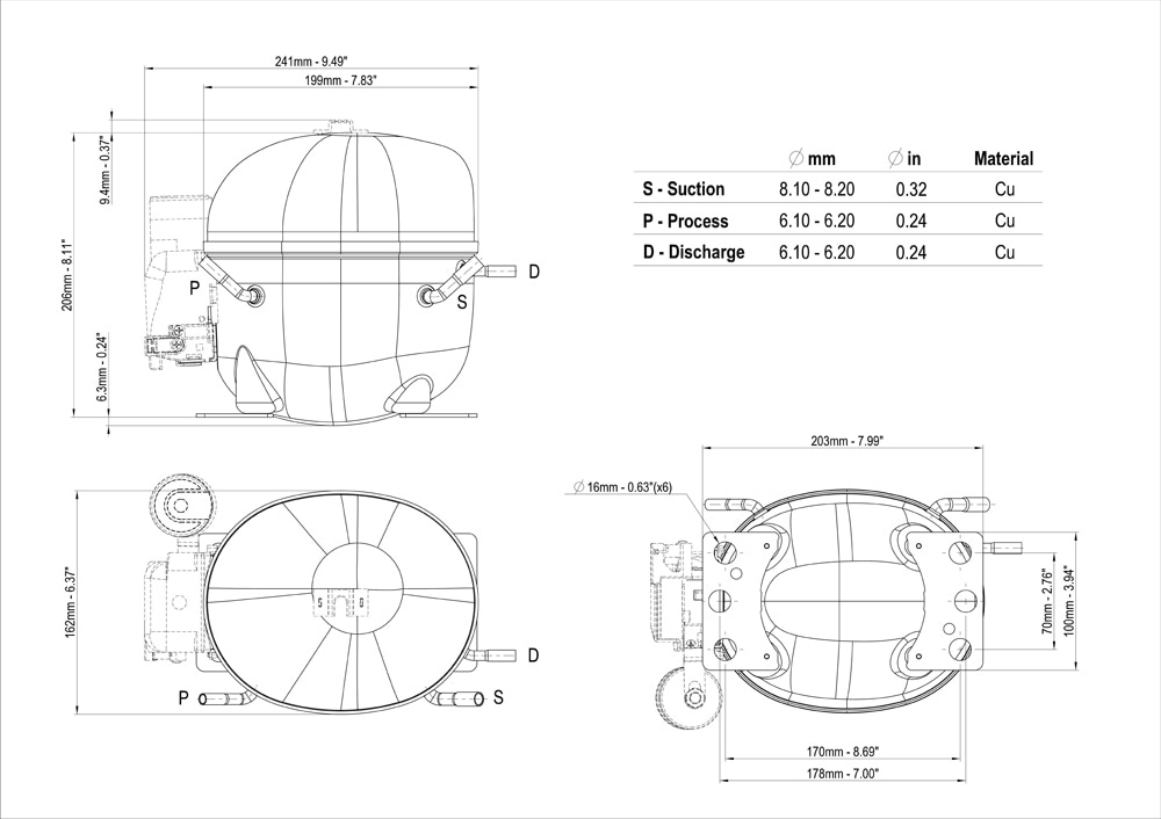

Wiring Diagram

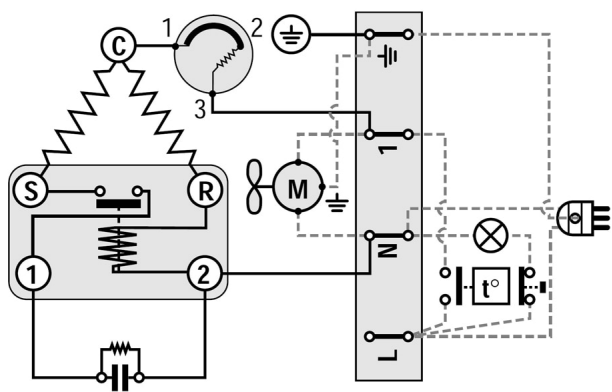

Assembly Instructions

